

悬壁销 ▶ 带挡圈槽型 · 台阶型/六角型 引导式外螺纹安装型

5日
发货

大批量
订购



请按图示订货

①~④选择型式和参数按序号顺序进行订购。

■ 台阶型

型号 (①代码) - ②规格 - ③Dg6 - ④Y - ⑤F - ⑥G - ⑦YC WC ME
 NPBCH - 6 - D6 - Y35 - F55 - G10 - YC

■ 可选加工



未税价(元)

优惠价


数量 1~9 10~
 价格 100% 另行报价

■ 台阶型

库存




CAD 3D

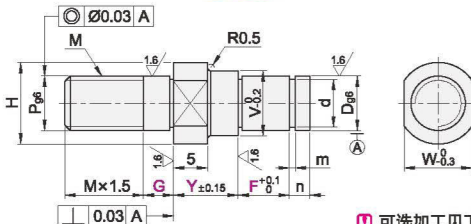

① 可选加工见下表。

W < V, Y ≥ 17 时,
 两平面宽度尺寸



型号	①代码	②规格	③Dg6	④Y	⑤F	⑥G	Pg6	M	V	H	W	d	m	n
NPBCH NPBCJ NPBCK	3	3	-0.002 -0.008	7~35	3~55	3~8	3	M3	5	7	5	2	+0.060 0	0.5
	4	4	-0.004 -0.012				4	M4	6	8	6	3	+0.075 0	0.7
	5	5	-0.005 -0.014				5	M5	7	9	7	4	+0.090 0	0.9
	6	6	-0.006 -0.017				6	M6	8	10	8	5	+0.090 -0.090	1.15
	8	8	-0.007 -0.020	7~65	5~110	5~10	8	M8	10	12	10	7	+0.090 -0.090	1.35
	10	10	-0.008 -0.021				10	M10	13	15	13	9.6	+0.090 -0.090	1.5
	12	12	-0.009 -0.022				12	M12	15	17	14	11.5	+0.090 -0.090	1.75
	13	13	-0.010 -0.023						16	18	15	12.4	+0.090 -0.090	1.9
	15	15	-0.011 -0.024						18	20	17	14.3	+0.090 -0.090	2.1
	16	16	-0.012 -0.025						19	21	18	15.2	+0.090 -0.090	2.3
	17	17	-0.013 -0.026						20	23	20	16.2	+0.090 -0.090	2.5
	18	18	-0.014 -0.027						21	24	21	17	+0.090 -0.090	2.7
	20	20	-0.015 -0.028	10~110	5~20	5~15	20	M20	23	26	24	19	+0.090 -0.090	3.0
	20A	20A	-0.016 -0.029				16	M16	23	26	24	19	+0.090 -0.090	3.0
	22	22	-0.017 -0.030				20	M20	26	28	25	21	+0.090 -0.090	3.5
	22A	22A	-0.018 -0.031				16	M16	26	28	25	21	+0.090 -0.090	3.5
	25	25	-0.019 -0.032				20	M20	29	31	27	23.9	+0.090 -0.090	4.0
	25A	25A	-0.020 -0.033				16	M16	29	31	27	23.9	+0.090 -0.090	4.0
	30	30	-0.021 -0.034				20	M20	34	36	32	28.6	+0.090 -0.090	4.5
	30A	30A	-0.022 -0.035				16	M16	34	36	32	28.6	+0.090 -0.090	4.5


■ 六角型

库存




CAD 3D

螺纹长度固定型



螺纹长度指定型



型号	①代码	②规格	③Dg6	④Y	⑤F	⑥G	⑦E	Pg6	M	S (C)	d	m	n
螺纹长度 固定型	3	3	-0.002 -0.008	2~32	3~55	3~8	4~10	3	M3	6	6.9	2	+0.060 0
	4	4	-0.004 -0.012					4	M4	7	8.1	3	+0.075 0
	5	5	-0.005 -0.014					5	M5	8	9.2	4	+0.090 0
	6	6	-0.006 -0.017					6	M6	9	10.3	5	+0.090 -0.090
	8	8	-0.007 -0.020	2~65	5~110	5~10	8~18	8	M8	10	11.5	7	+0.090 -0.090
	10	10	-0.008 -0.021					10	M10	13	15.0	9.6	+0.090 -0.090
	12	12	-0.009 -0.022					12	M12	15	16.2	11.5	+0.090 -0.090
	13	13	-0.010 -0.023					13	M13	16	17.3	12.4	+0.090 -0.090
	15	15	-0.011 -0.024					15	M15	18	19.6	14.3	+0.090 -0.090
	16	16	-0.012 -0.025					16	M16	19	20.7	15.2	+0.090 -0.090
螺纹长度 指定型	17	17	-0.013 -0.026	10~110	5~20	5~15	12~25	17	M17	20	21.9	16.2	+0.090 -0.090
	18	18	-0.014 -0.027					18	M18	21	23.0	17.3	+0.090 -0.090
	20	20	-0.015 -0.028					20	M20	24	27.7	19	+0.090 -0.090
	20A	20A	-0.016 -0.029					16	M16	24	27.7	19	+0.090 -0.090
	22	22	-0.017 -0.030	4~65	20~42	5~20	20~42	22	M22	27	30.0	21	+0.090 -0.090
	22A	22A	-0.018 -0.031					16	M16	27	30.0	21	+0.090 -0.090

■ 可选加工

代码	技术说明
YC	Y尺寸公差变更 ① 变更Y尺寸公差为±0.04
WC	变更为四面扳手槽 ① 仅适用台阶型。
ME	附带挡圈 ① 规格3~8:E形挡圈 规格10~30A:C形挡圈